

SPECIFICATIONS

Sustainable Solutions

Customer Service: 1-800-460-7019

www.fluidfaucets.com

Specifications

- Heavy brass construction for strength and reliability
- Single lever handle operation allows both volume and temperature control.
- Single lever handle diverts water to spout or hand shower.
- European made Kerox cartridge ensures life-long and trouble-free performance
- Inlet connection 1/2" NPT female thread
- Strong, stable floor mount with easy installation
- Adjustable Hand shower support
- Fixed tub spout
- Floor mounted base included

Flow Rate

- 5.3 gpm (20 L/min) @ 45 psig and 6.8 gpm (26 L/min)
 @ 60 psig for spout
- 1.8gpm (6.8 L/min) @ 45 psig for hand shower

Finish


- CP (Polished Chrome)
- PVD-BN (PVD Brushed Nickel)


Codes and Standards

- ANSI/ASME A112.18.1
- CSA B125.1
- IAPMO / cUPC Listed

Warranty

- Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.
- 2 Year Limited Warranty on all industrial, commercial and

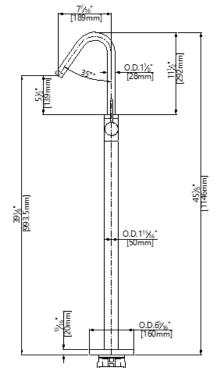



fluid Free Standing Tub Filler with Hand Shower Model: F4013





