

**APOLLO Vanity**  
**3-524-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_  
PROJECT \_\_\_\_\_ DATE \_\_\_\_\_



-22 Oiled Bronze



Alternative position




-14 Polished Chrome



-24 Satin Nickel

- LIGHT SOURCE** 2 x 10.1W LED, 3000K, CRI 90
- LUMINAIRE POWER** 24.1W at 120V
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: 1727 lm (LM-79)
- INPUT VOLTAGE** 120V to 277V AC, 50/60Hz
- DRIVER OUTPUT** 700mA, 29.4W max power
- DIMMING** TRIAC and ELV dimming at 120V AC;  
0-10V dimming, 100% to 1% current output
- CONSTRUCTION** Plated Steel and Acrylic
- DIFFUSER** - Matte White Acrylic
- FINISHES** Polished Chrome (-14), Oiled Bronze (-22),  
Satin Nickel (-24)
- MOUNTING** 4" Square J-Box\* with a single device mud ring  
\*Deep J-Box (Required to house driver)
- STANDARDS** UL Dry/Damp listed, ADA Compliant, Conforms to  
UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

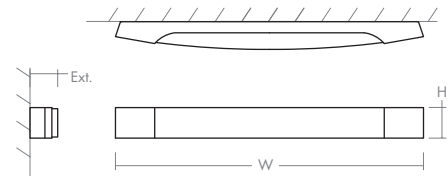

**DIMENSIONS**

- W:** 27.75"
- H:** 2.75"
- Ext:** 2.50"
- M.C:** 1.38" From top of fixture

Order example for standard fixture:  
**3-524-24** (x- Voltage - xxx-Sequence # - xx-Finish)  
3: 120V to 277V  
Order example for optional color temperatures: **3-524-2724**  
27: 2700K, 35: 3500K, 40: 4000K

