TOTO®

MS854114/MS853113

Ultimate® One-Piece Toilet, 1.6GPF

FEATURES

- Power Gravity® flushing system (1.6GPF/6.0LPF)
- One-piece decorative toilet with low-profile tank
- Chrome trip lever
- Elongated front bowl with SoftClose® seat (SS114) or round front bowl with SoftClose seat (SS113)
- 12" Rough-in

MODELS

- MS854114
  Elongated bowl with SoftClose seat (SS114)

- MS853113
  Round bowl with SoftClose seat (SS113)

COLORS/FINISHES

- Standard
  #01 Cotton
  #03 Bone
  #11 Colonial White
  #12 Sedona Beige

PRODUCT SPECIFICATION

The one-piece Power Gravity flushing system toilet shall be 1.6GPF/6.0LPF. Toilet shall be of elongated front bowl (MS854) or round front bowl (MS853) with a low-profile tank and SoftClose seat. Toilet shall have chrome trip lever. Toilet shall be TOTO Model MS854114_____ (elongated), MS853113_____ (round).

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), State of Massachusetts , City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
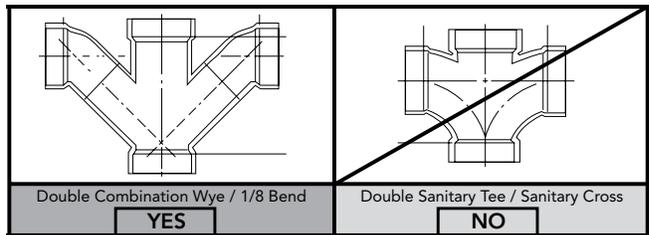
MS854114/MS853113

Ultimate® One-Piece Toilet, 1.6GPF

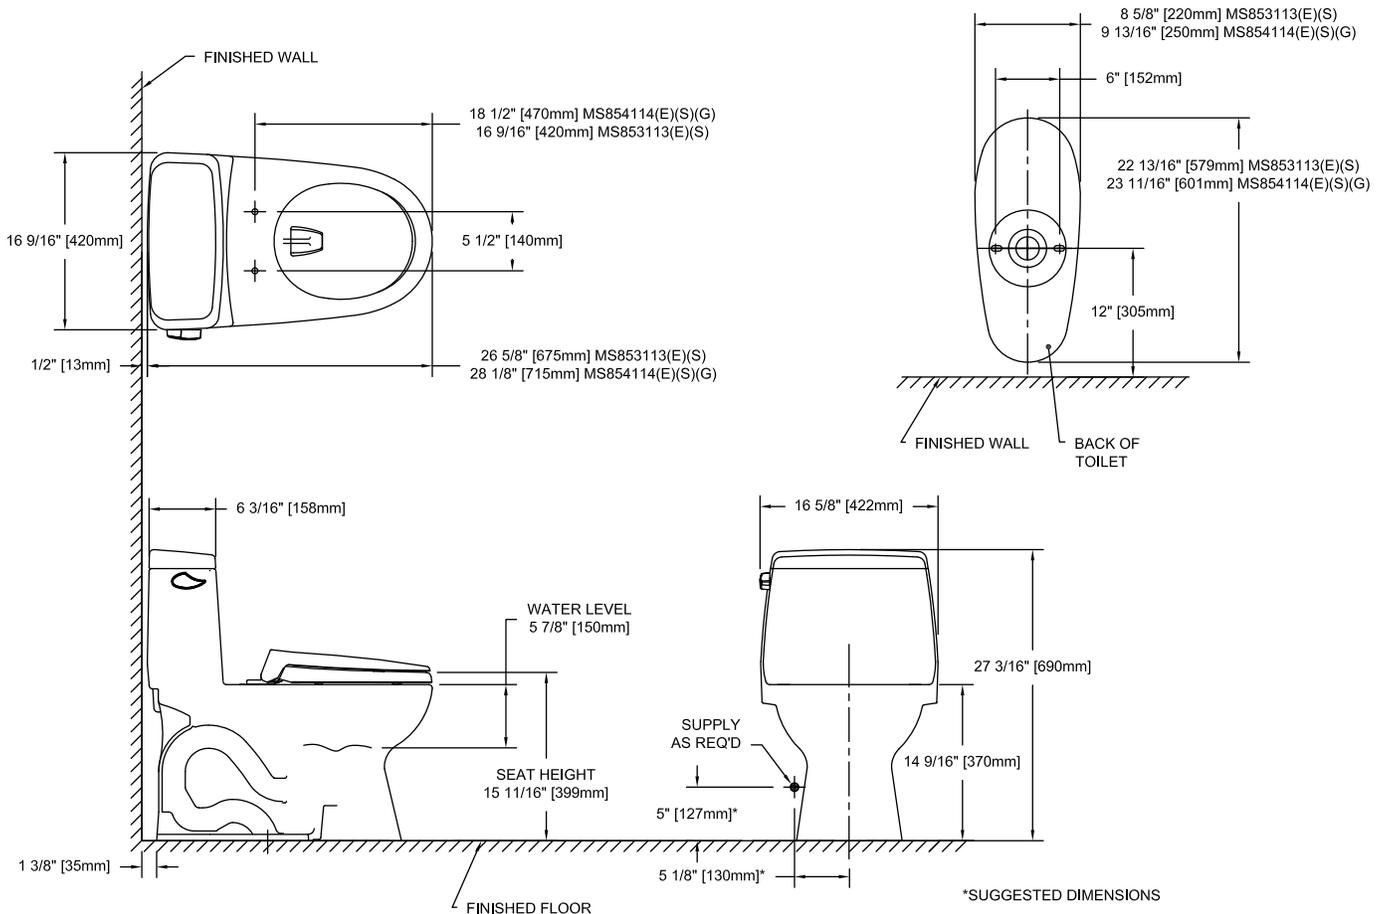## SPECIFICATIONS

- Water Use   1.6 GPF/6.0LPF
- Flush System   Power Gravity®
- Min. Water Pressure   8 psi (static)
- Water Surface   10-1/4" x 8-1/4"
- Trap Diameter   2-1/8"
- Rough-in   12"
- Trap Seal   2-1/4"
- Warranty   One Year Limited Warranty
- Material   Vitreous china
- Shipping Weight   MS854114 91 lbs.
                                   MS853113 93lbs.

- Shipping Dimensions   29-1/2" L x 18"W
                                      x 19-1/4" H1 x 27-1/8" H2

INSTALLATION NOTES

Back-to-Back Toilet Installations:
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

Double Combination Wye / 1/8 Bend	Double Sanitary Tee / Sanitary Cross
YES	**NO**

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

FINISHED WALL

18 1/2" [470mm] MS854114(E)(S)(G)
16 9/16" [420mm] MS853113(E)(S)

16 9/16" [420mm]

5 1/2" [140mm]

1/2" [13mm]

26 5/8" [675mm] MS853113(E)(S)
28 1/8" [715mm] MS854114(E)(S)(G)

6 3/16" [158mm]

WATER LEVEL
5 7/8" [150mm]

SEAT HEIGHT
15 11/16" [399mm]

1 3/8" [35mm]

FINISHED FLOOR

8 5/8" [220mm] MS853113(E)(S)
9 13/16" [250mm] MS854114(E)(S)(G)

6" [152mm]

22 13/16" [579mm] MS853113(E)(S)
23 11/16" [601mm] MS854114(E)(S)(G)

12" [305mm]

FINISHED WALL   BACK OF TOILET

16 5/8" [422mm]

27 3/16" [690mm]

SUPPLY AS REQ'D

14 9/16" [370mm]

5" [127mm]*

5 1/8" [130mm]*

*SUGGESTED DIMENSIONS

TOTO®

These dimensions and specifications are subject to change without notice