


## ASSEMBLY INSTRUCTIONS

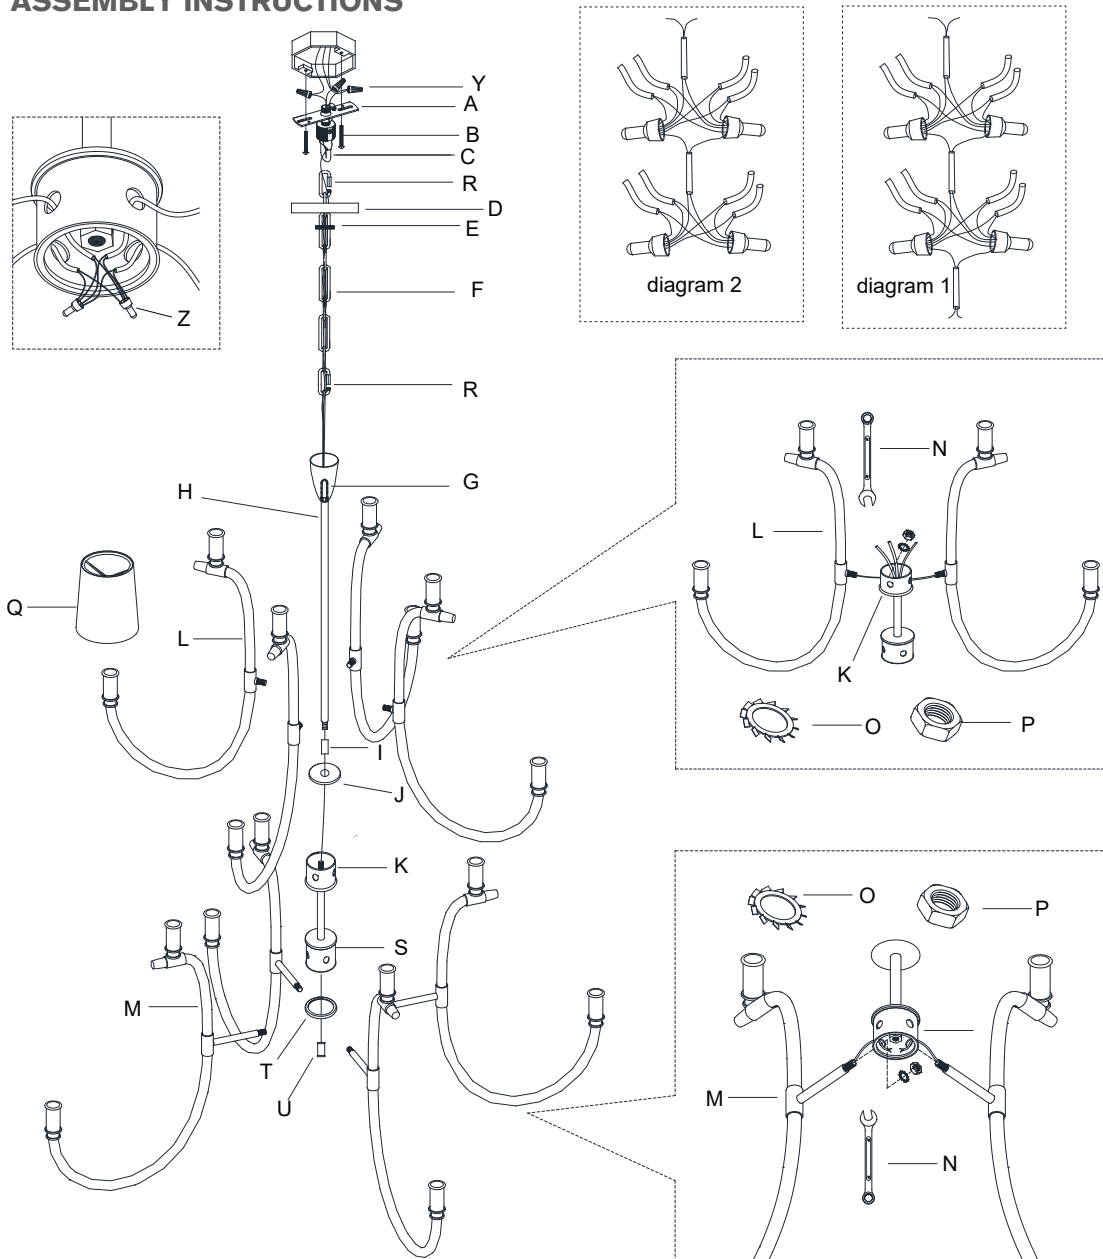

## Clarice Large Chandelier

Item # JN 5030

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING\*\*\*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**


**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

**NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.**

- Carefully remove all parts from the box.
- Remove the collar loop (C) from the chain (F) by unscrewing the quick link (R).
- Install the mounting plate (A) and collar loop (C) to the junction box with mounting screws (B) provided. Using a wrench (not provided) secure the mounting plate (B) and collar loop (C) to the threaded nipple using provided hex nuts.
- Install the canopy (D) to collar loop (C) and secure with collar ring (E). If needed, adjust collar loop (C) height by loosening hex nuts and screwing collar loop (C) up or down then re-secure.
- Gently set the fixture arms (L) to the hub (K) and secure with the washers (O) and hex nut (P) using the wrench (N). Check that the arms are spaced evenly before final tightening.
- Connect the fixture arms (L) ribbed wire (no markings) to the fixture ribbed wire (no markings) and connect ribbed wire (no markings) with CE-5 wire nuts (Z) and wrap the connection with the electrical tape (not included) as shown in the diagram 1.
- Connect the fixture arms (L) smooth wire (with markings) to the fixture smooth wire (with markings) and connect smooth wire (with markings) with CE-5 wire nuts (Z) and wrap the connection with the electrical tape (not included) as shown in the diagram 1.
- Weave the fixture wires through hub cap (J) and coupling (I) then rod (H).
- Install the hub cap (J) to the hub (K) and secure with the coupling (I), then thread the rod (H) to the coupling (I).
- With the fixture desired height, shorten the chain (F) as needed using the chain pliers (not included).

## ASSEMBLY INSTRUCTIONS

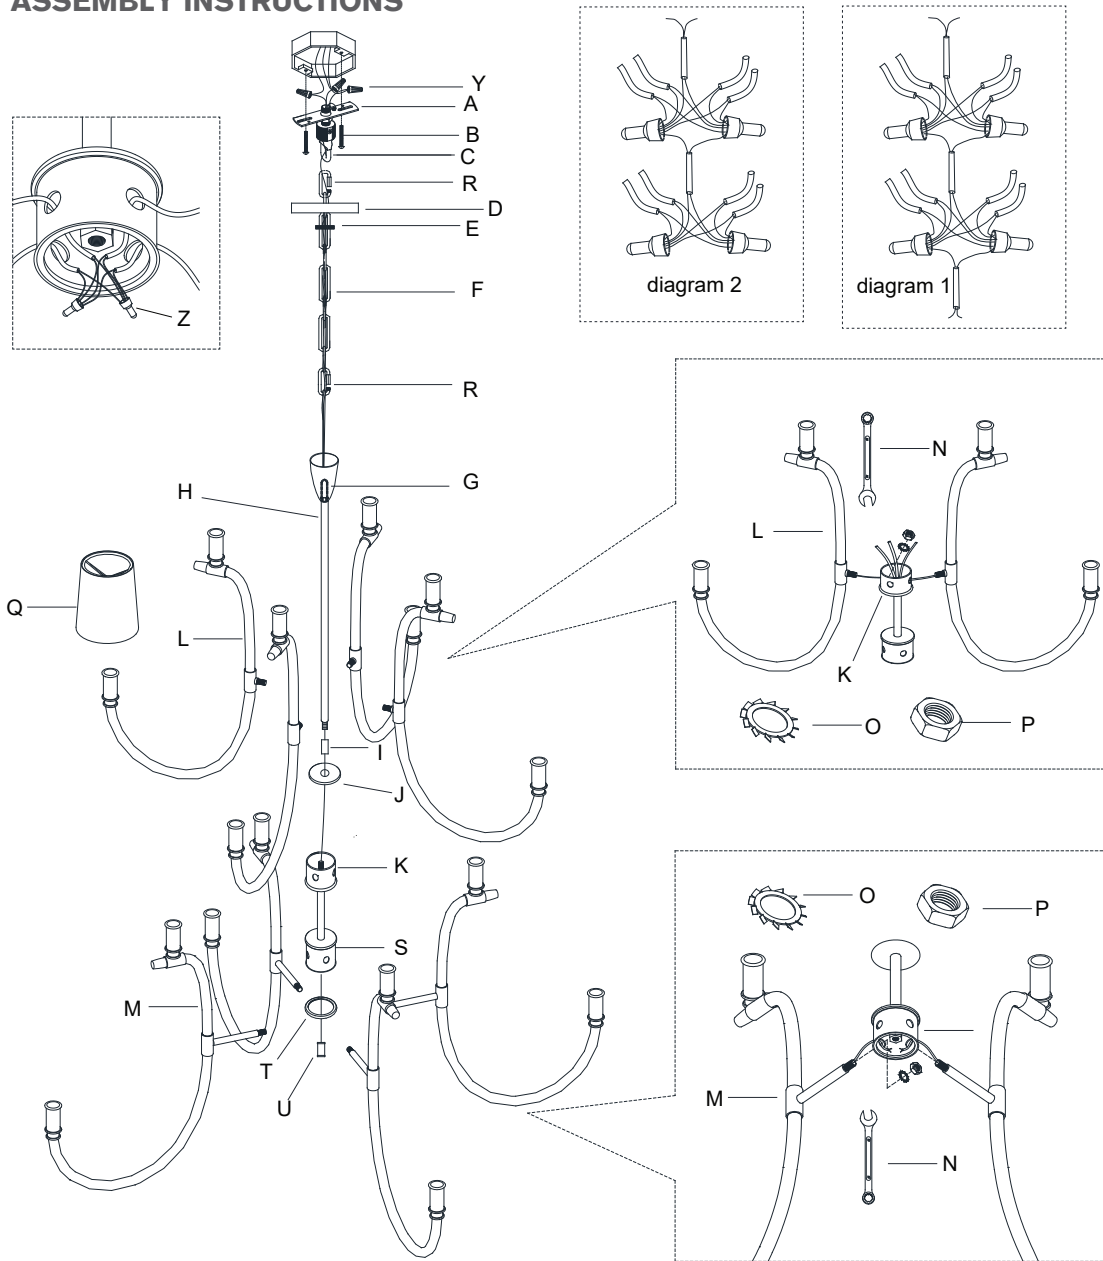

## Clarice Large Chandelier

Item # JN 5030

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING\*\*\*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**


**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

**NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.**

11. Open the chain quick link (R), then attach the chain quick link (R) to the collar loop (C).  
Secure the chain quick link (R).
12. Open the chain quick link (R) from the opposite side then attach to the fixture top loop (H).  
Secure the chain quick link (R).
13. Gently set the fixture arms (M) to the hub (S) and secure with the washers (O) and lock nuts (P) using the wrench (N). Check that the arms are spaced evenly before final tightening.
14. Connect the fixture arms (M) ribbed wire (no markings) to the connect ribbed wire (no markings) with CE-5 wire nuts (Z) and wrap the connection with the electrical tape (not included) as shown in the diagram 2.
15. Connect the fixture arms (M) smooth wire (with markings) to the connect smooth wire (with markings) with CE-5 wire nuts (Z) and wrap the connection with the electrical tape (not included) as shown in the diagram 2.
16. Install hub cap (T) to bottom of the hub (S) and secure with the finial (U).
17. Weave the fixture wires through the chain (F).
18. When you reach the canopy (D) and collar loop (C), measure the wires then cut, be certain to leave enough length to connect the wires in the junction box.
19. Strip the insulation on the fixture wires about 5/8".
20. Loosen the collar ring (E) and let the canopy (D) slip down the chain (G) carefully.
21. Twist the fixture wires and push through the center hole of the collar loop (C).
22. Wrap the fixture ground wire to the green ground screw on the mounting plate (A) and secure, then connect to the ground wire in the junction box using the wire nut (Y).  
IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.

## ASSEMBLY INSTRUCTIONS

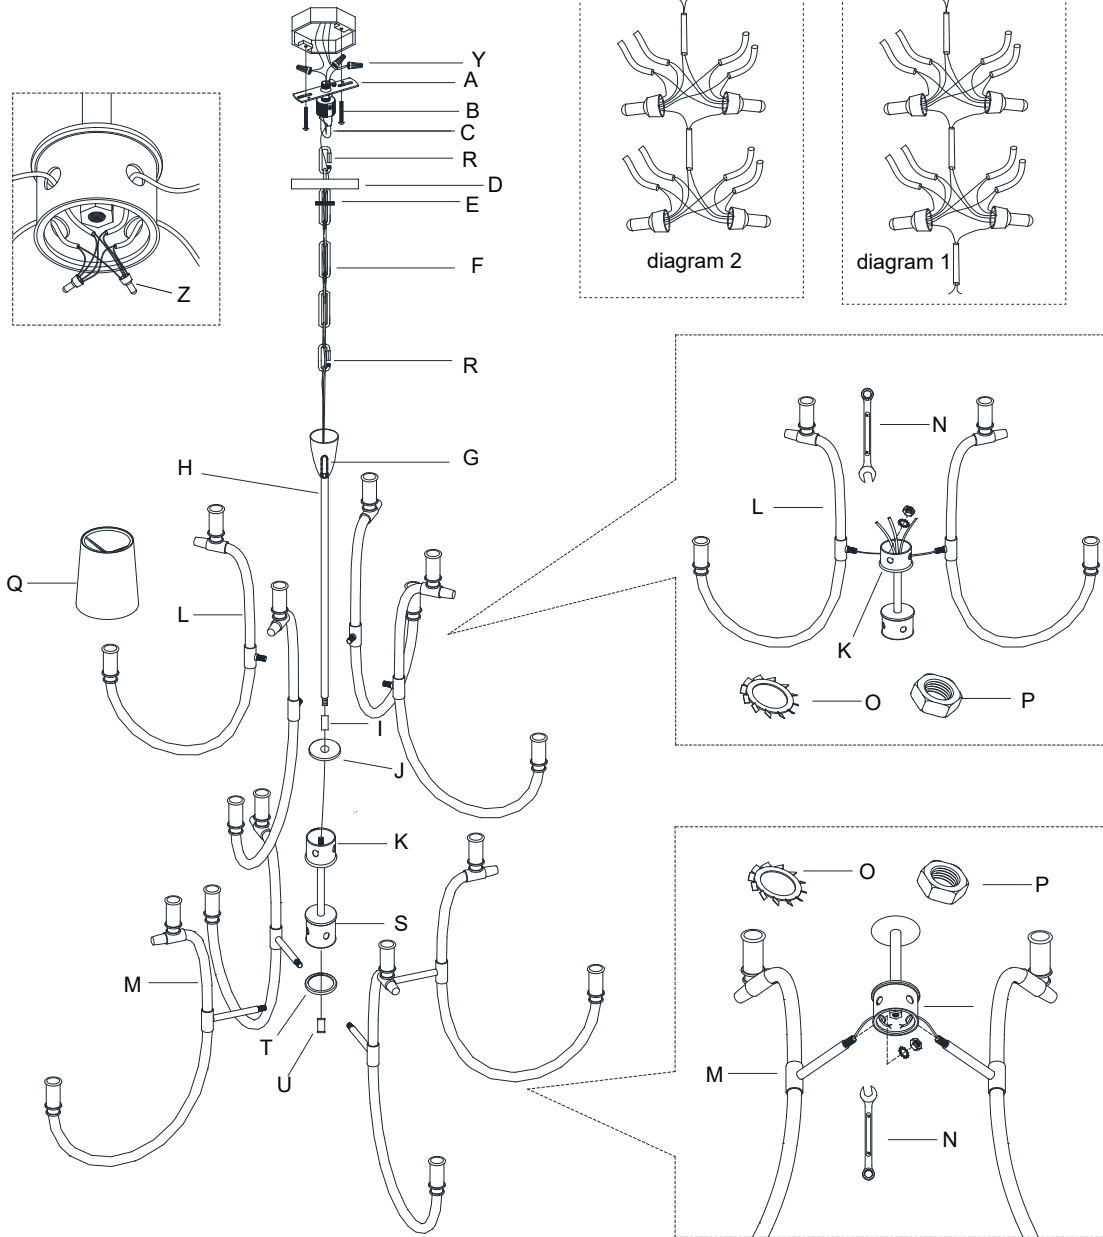

## Clarice Large Chandelier

Item # JN 5030

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING\*\*\*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

**NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.**

23. Connect the fixture ribbed wire (no markings) to the neutral wire in the junction box using the wire nut (Y).

24. Connect the fixture smooth wire (with markings) to the hot wire in the junction box using the wire nut (Y).

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.

25. Carefully tuck the wire connections into the junction box.

26. Install the canopy (D) to the junction box and secure with the collar ring (E).

27. Insert bulbs (not included) into the sockets.

28. Clip the shades (Q) onto the bulbs.

29. Installation is complete, turn on power at fuse or circuit breaker.

\*\*\*Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.