

NTM-54

6" BR/PAR30 Stepped Baffle with Adjustable Gimbal Ring

Type

Project

Catalog No.

Notes

FEATURES

Trim: Precision spun 0.040 baffle with deep grooves to reduce aperture glare. Metal trim with gimbal ring can be adjusted up to 30°. Separate trim ring available in plastic or metal, may also be used with custom combination of ring finishes.

Mounting: Trim includes two "V" torsion springs to mount trim securely to housing. Replacement "V" torsion springs are available (NRA-86). Remove socket from socket plate within housing (if applicable), and mount lamp into gimbal ring. Note: Requires trim clips when used with Non-IC housings (NRA-92)

COMPATIBLE HOUSINGS

Compatible with line voltage housings. See individual specification sheets for more information.

LAMP

Line Voltage:

75W BR/PAR30 Maximum (NFBIC-6INCATA ; NH-26Q; NH-26QNB; NH-27Q; NHIC-17/100DWQA; NHIC-17QAT; NHIC-17QNBAT; NHIC-27QAT; NHR-26Q; NHR-27Q; NHRIC-17QAT; NHRIC-17QNBAT; NHRIC-27QAT)

LABELS AND LISTINGS

cULus Listed for Damp Location when used with compatible housing.




PRODUCT IMAGES AND DIMENSIONS



NTM-54B



NTM-54W

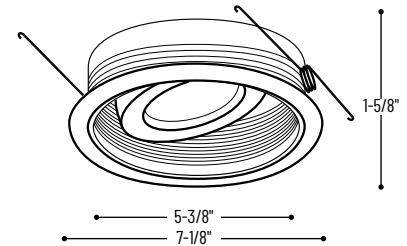

6" BR/PAR30 Stepped Baffle with Adjustable Gimbal

Catalog No.

NTM-54B = 6" BR/PAR30 Black Stepped Baffle with Adjustable Gimbal, White Ring
NTM-54W = 6" BR/PAR30 White Stepped Baffle with Adjustable Gimbal, White Ring

Compatible Housings

Catalog No.

NFBIC-6INCATA = 2-Hour Fire Rated New Construction / 75W max.
NHIC-17/100DWQA = IC Air-Tight Double Wall New Construction / 75W max.
NHIC-17QAT = IC Air-Tight New Construction / 75W max.
NHIC-17QNBAT = IC Air-Tight New Construction, No Bracket / 75W max.
NHRIC-17QAT = IC Air-Tight Remodel / 75W max.
NHRIC-17QNBAT = IC Air-Tight Remodel, No Bracket / 75W max.
NH-26Q = Non-IC New Construction / 75W max.
NH-26QNB = Non-IC New Construction, No Bracket / 75W max.
NHR-26Q = Non-IC Remodel / 75W max.
NH-27Q = Non-IC Shallow New Construction Housing / 75W Max
NHR-27Q = Non-IC Shallow Remodel / 75W Max
NHIC-27QAT = ICAT Shallow New Construction / 75W Max
NHRIC-27QAT = ICAT Shallow Remodel / 75W Max

Example: **NTM-54B** = 6" BR/PAR30 Black Stepped Baffle with Adjustable Gimbal, White Ring