

# NUDTW-88 Series

LEDUR Tunable White 120V Edge-Lit Under Cabinet

Source: 7W

350lm per foot

Type

Project

Catalog No.

Notes

## PRODUCT DESCRIPTION

LEDUR LED Tunable White under cabinet uses edge-lit placement of diodes to give a Uniform Reflectance of light. The LEDUR TW allows the end user to select between kelvin temperatures at time of installation with a 3 position switch. The LEDUR TW produces an even 350 lumens/ 7 watts average per foot. Dimmable, no UV and forward heat make LEDUR TW the perfect energy saving lighting solution in under cabinet and shelf lighting. The LEDUR TW's uniform reflectance is excellent when used under cabinet over granite, polished stone or any reflective surface, additionally it is excellent in retail display lighting where diode image might distract from display merchandise.

## FEATURES

- Two luminaires available in three kelvin temperatures each (One luminaire offers 2700K, 3000K or 3500K, another is offered in 3000K, 4000K or 5000K)
- Edge lit design eliminates LED diode image
- Excellent color rendition - 90+ CRI
- 350 Lumens/ 7 watts per foot average
- Available in 6 different lengths
- Dark Bronze or White Finish
- Built-in on/off rocker switch and 3 position sliding color temperature switch
- Linkable up to 400 Watts fixtures
- 3 wire grounded electrical port on both ends for power or linking
- Quick connect stab-in connectors included
- Captive Screws for easy mounting
- Integral electronic dimmable driver

## ELECTRICAL

**Input Voltage:** 120V

**Lumens:** 350lm per foot

**Wattage:**

**8"** = 4.9W; **11"** = 6.7W; **18"** = 11W; **22"** = 12W; **32"** = 16W; **42"** = 16W

**Color Temperature:**

**(blank)** = 2700K, 3000K, 3500K; **/345** = 3000K, 4000K, 5000K

**CRI:** 90+CRI

**Operating Temp.:** 0°C to 45°C ambient temperature

**Maximum Run Length:** 400W

**Dimming:** Triac

[Click Here](#) or check complete dimmer list at [www.NoraLighting.com](http://www.NoraLighting.com) in the "Compatibility" page under "Resources" tab.

## CONSTRUCTION

**Housing:** Rear wireway access cover with stab-in electrical connectors facilitate wiring without opening the fixture. Additional knock-outs for top and back wiring.

**Installation:** Mounting hardware is included with each unit. Captive screws allow for quick installation, simply wire using rear door and quick connects, and hold in place and drive captive screws into material. Captives screws are covered with an included cap for a beautiful finished look.


**Included with every fixture:** Mounting Hardware and 1/2" die-cast metallic cable clamp, end to end connector, installed On/Off rocker switch and 3 position kelvin selection switch.

## LABELS AND LISTINGS


- cULus Listed for Dry Location
- ENERGY STAR® Certified
- [5-Year Limited Warranty](#)
- Can be used to comply with 2016 Title 24 - part 6 High Efficacy LED light source requirements



## PRODUCT IMAGES AND DIMENSIONS

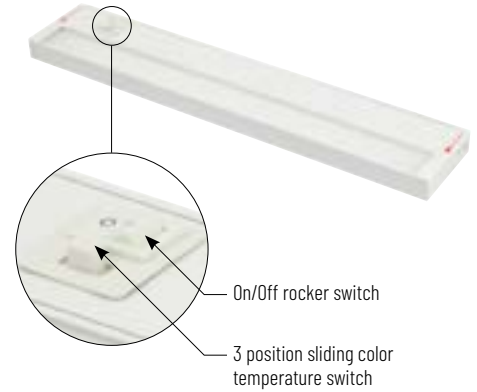

Captive Screws for easy mounting located at each end under removable cap

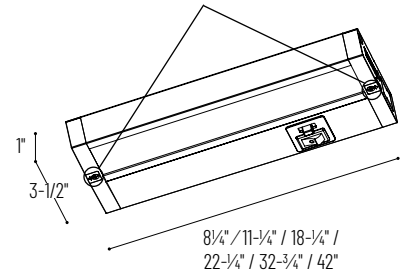

## LEDUR Tunable White 120V Edge-Lit Under Cabinet

Series	Length	CCT	Finish
NUDTW-88	08 = 8"	blank = 2700K, 3000K, 3500K	/BZ = Bronze /WH = White
	11 = 11"		
	18 = 18"		
	22 = 22"		
	32 = 32"		
	42 = 42"		

Example: **NUDTW-8822/WH** = 22" LEDUR Tunable White 120V Edge-Lit Under Cabinet, Selectable CCT (2700K, 3000K, 3500K) White Finish

## NUDTW-88 Accessories

LEDUR Tunable White 120V Edge-Lit Under Cabinet

Source: 7W

350lm per foot

Type

Project

Catalog No.

Notes



Junction Box

**NUA-802B** Black  
**NUA-802W** White  
Used to power NUDTW-88 series using Jumper Cables or NUA-804 Hardwire Connector.  
Finish: Black or White



End to End Connector

**NUA-803**  
Used to join two NUDTW-88 fixtures seamlessly together. 3-wire grounded connector.  
Finish: White



72" 3-Wire Grounded Hardwire Connector

**NUA-804B** Black  
**NUA-804W** White  
Used to hardwire NUDTW-88 fixtures to NUA-802 or junction box (by others).  
Finish: Black or White



72" Cord & Plug

**NUA-805B** Black  
**NUA-805W** White  
Convert NUDTW-88 series fixtures from hardwire to direct plug-in units.  
Finish: Black or White



Jumper Cable

**NUA-806B** 6" Black  
**NUA-806W** 6" White  
**NUA-812B** 12" Black  
**NUA-812W** 12" White  
**NUA-824B** 24" Black  
**NUA-824W** 24" White  
**NUA-872B** 72" Black  
**NUA-872W** 72" White

Used to join NUDTW-88 fixtures together or to NUA-802.  
Finish: Black or White