NSW-740

Ari LED Step Light with Horizontal Face Plate
Source: 5W LED
       80lm

PRODUCT DESCRIPTION

Long lasting, energy efficient LED step lights provide illumination for safety around steps, balcony areas, or walkways. Efficient LED light sources are low maintenance and savings over 50% in running costs when compared to 10W incandescent step lights.

FEATURES

· Screwless face plate
· cETLus listed for Wet Location
· Save over 50% when compared to 10W incandescent step lights
· Integrated, embedded non-dimmable driver
· No harmful ultra violet light, infrared wavelengths, or light leak
· Heavy duty, low profile aesthetic face plate
· Internal brackets for installation hardware

SPECIFICATION

Construction: Sturdy 0.09" die-cast aluminum face plate and housing.
Mounting: Easily installs in a standard single gang switch box with minimum inner compartment size of 2" x 3.8" x 1.8" (width x length x depth). Mounts horizontally in the single gang box.
Face Plate: Powder coated or brushed nickel die-cast aluminum.

ELECTRICAL

Input Voltage: 120V
Lumens / Wattage: 80lm / 5W
Driver: Integrated, embedded non-dimmable driver
Wiring: 18AWG, rated 105ºC 300V
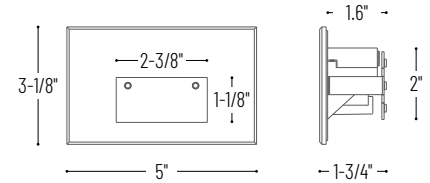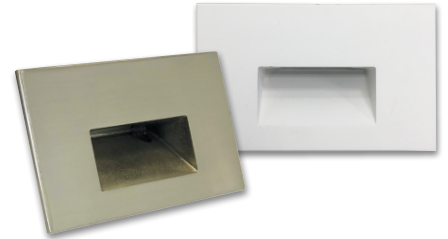**Color Temperature:** 3000K or 4000K
CRI: 90+ CRI
Dimming: Non-Dimmable

LISTINGS AND WARRANTY

· cETLus Listed for Wet Location
· 5-Year Limited Warranty

PRODUCT IMAGES AND DIMENSIONS

Ari LED Step Light with Horizontal Face Plate

Catalog No.	Color Temperature / CRI	Finish
NSW-740 = Ari LED Step Light with Horizontal Face Plate	**/30** = 3000K / 90 CRI	**BN** = Brushed Nickel
	/40 = 4000K / 90 CRI	**W** = White

Example: **NSW-740/30W** = Ari LED Step Light with Horizontal Face Plate, 3000K / 90 CRI, White